


# Products Line up of Isolators/Circulators



Model;	Types of Isolator/Circulator	Feature	Frequency Range
ESI-	Lumped Element Type	Available small size Surface Mountable	360 MHz to 3500 MHz
DSI(C)-	Distributed Type	High Performance High Power, Up to 200Watts Ave.	800 MHz to 2200 MHz
DSA-	Distributed Type with Attenuator	same as above Attenuation: 10 to 40 +/- 1.0 dB	800 MHz to 2200MHz
MSI(C)-	Distributed Type	High Performance High Power, Up to 200Watts Ave.	470 MHz to 3600 MHz
MSA-	Distributed Type with Attenuator	same as above Attenuation: 10 to 40 +/- 1.0 dB	800 MHz to 2200MHz

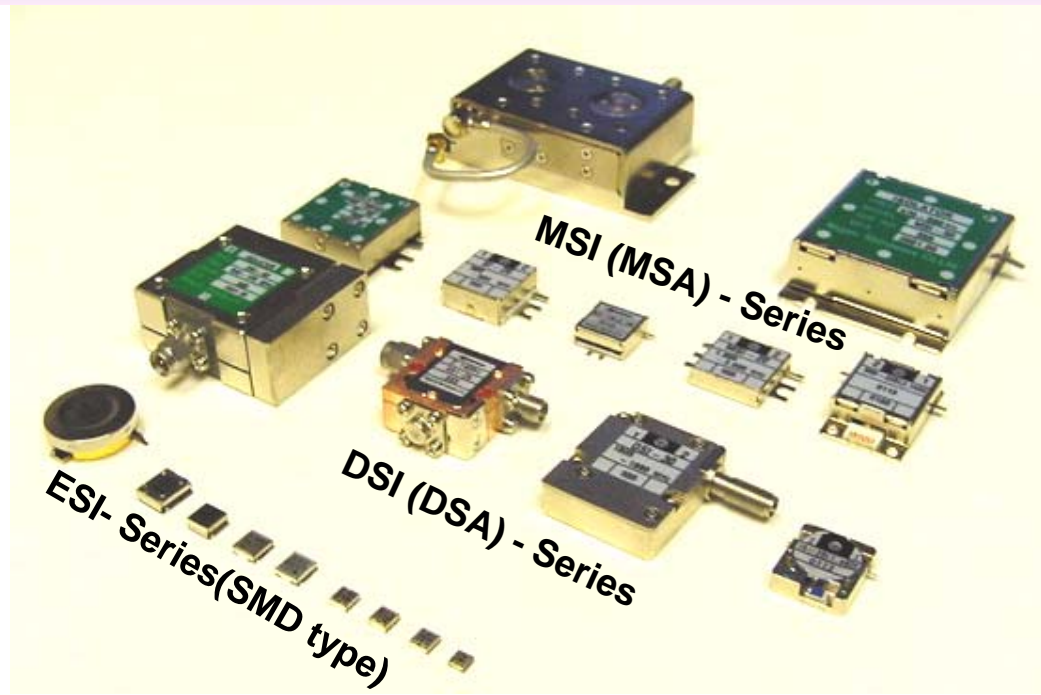