

3.2mm SQUARE ISOLATOR

MODEL ESMI-3IDL 0874 M 01 - T

(1) (2) (3) (4) (5)


- (1) Series ESMI-3IDL : 1.2mm Height / 800-1000MHz
- (2) Center Frequency
- (3) M : MHz
- (4) Control No.
- (5) T : Taping
Blank : Bulk

Target Specification

Frequency (MHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. (IN) Max.	V.S.W.R. (OUT) Max.	Attenuation		Handling Power Max. (W)	Reflection Power Max. (W)
					at 2f Min. (dB)	at 3f Min. (dB)		
824-925	0.75	5	1.50	1.70	5	5	2.5	0.6

Operating Temperature(deg.C) ; -35 to +85
Impedance ; 50 ohms Typ.

Shape & Size

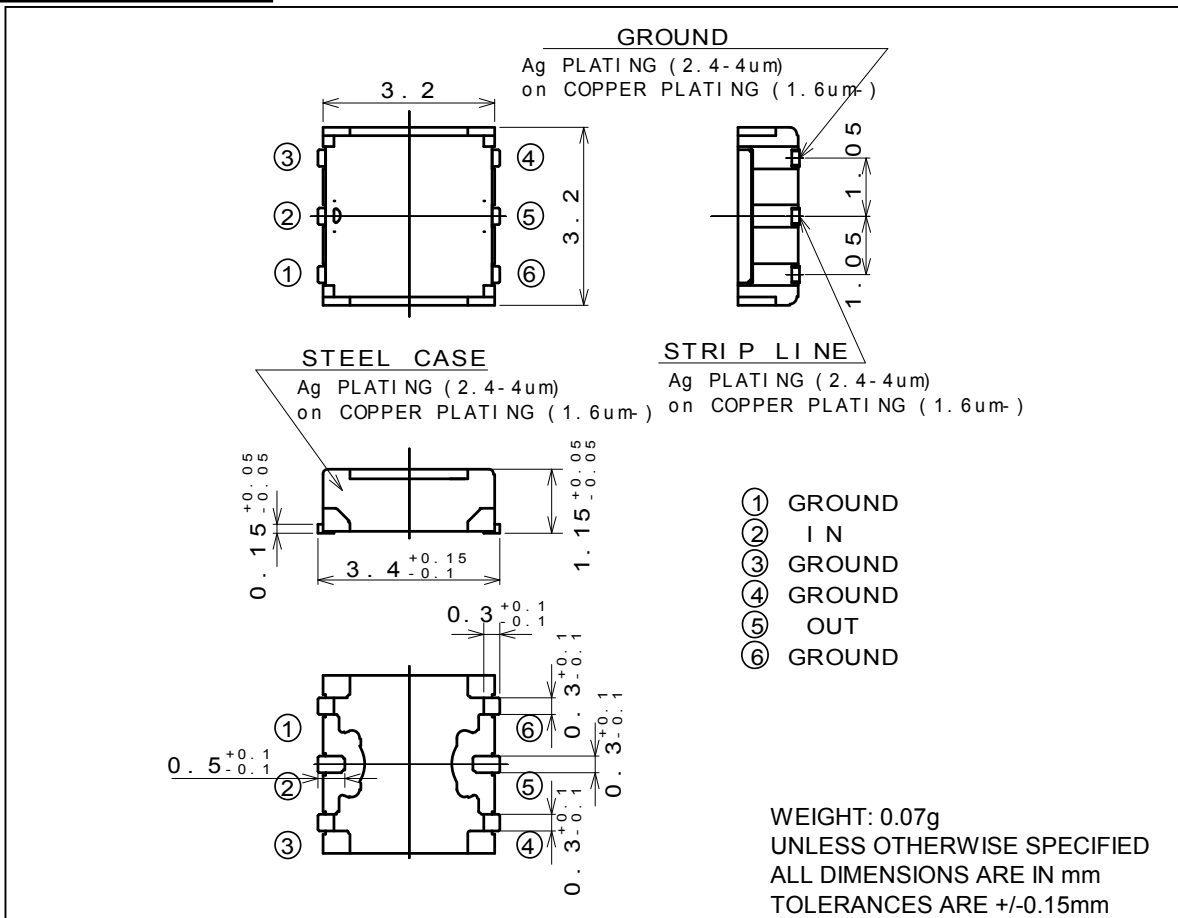

Note) This is tentative specifications under development.
There is some possibility which the specifications might be modified including mechanical dimension.