5mm SQUARE THIN TYPE ISOLATOR

MODEL ESI-5 [ ] 2.400 G - T

(1) (2) (3) (4) (5)

(1) 5mm Square Lumped Element Isolator
(2) Rotating Direction (R or L)
(3) Center Frequency
(4) G ; GHz
(5) T ; Taping
Blank ; Bulk

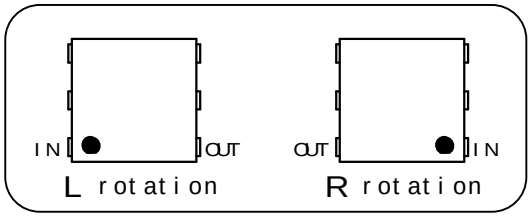

Target Specification

Frequency (GHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	Handling Power Max. (W)	Reflection Power Max. (W)
2.370-2.430	0.60	15	1.5	5.0	1.0

Operating Temperature(deg.C) ; -35 to +85
Impedance ; 50 ohms Typ.

Shape & Size

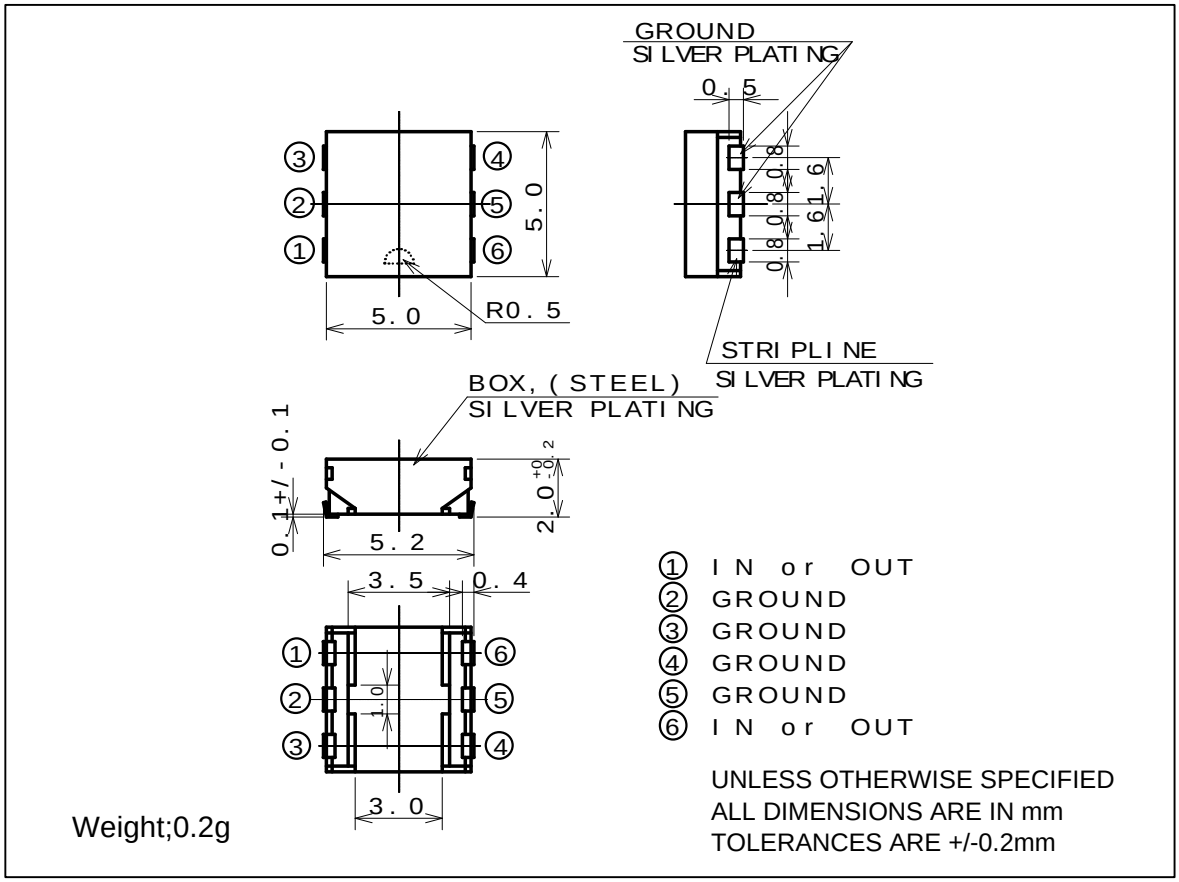

Weight;0.2g

TAE942

Hitachi Metals, Ltd. Tottori Works