

# 5mm SQUARE ISOLATOR

**MODEL** ESI-5CE [ ] 3.400 G 01- T  
 (1) (2) (3) (4) (5) (6)

(1) Series **ESI-5CE ; 2.5mm Height**

(2) Rotating Direction (R or L)


(3) Center Frequency

(4) G ; GHz

(5) Control No.

(6) T ; Taping

Blank ; Bulk

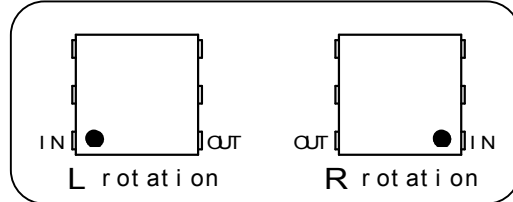


## Specification

Frequency (GHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	Handling Power Max. (W)	Reflection Power Max. (W)
3.300-3.500	1.0	10	1.8	5.0	1.0

Operating Temperature(deg.C) ; -35 to +85

Impedance ; 50 ohms Typ.

## Shape & Size

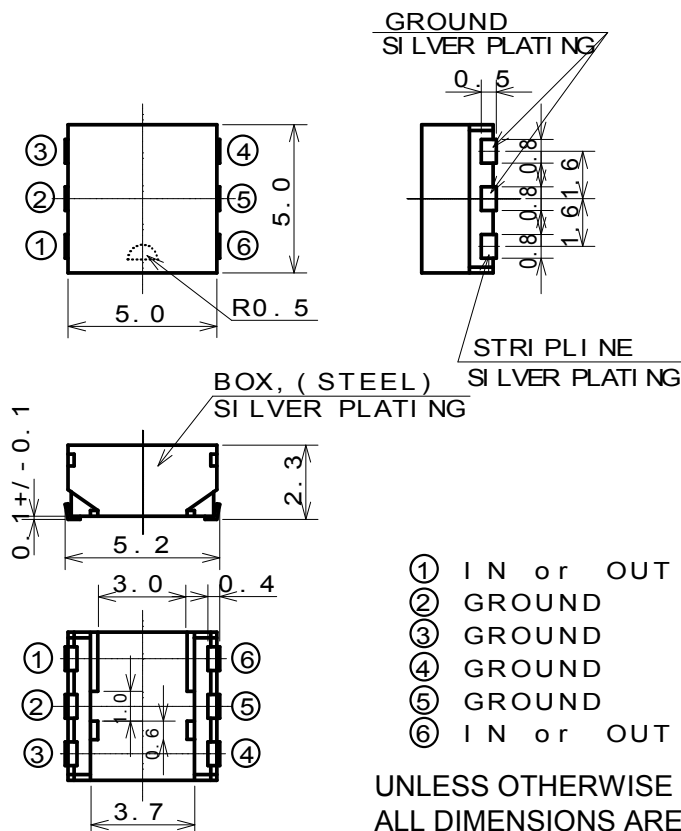

- ① IN or OUT
- ② GROUND
- ③ GROUND
- ④ GROUND
- ⑤ GROUND
- ⑥ IN or OUT

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN mm  
 TOLERANCES ARE +/-0.2mm

Weight;0.24g

TBE469