

All the technical data and information contained herein are subject to change without notice.

P/N	ESLF-S090WR
Doc. No.	LF-ESLF-S090WR-0806A

2012 Size


Chip Multilayer Diplexer

ESLF-S090WR

RoHS
Compliant

P/N	ESLF-S090WR
Doc. No.	LF-ESLF-S090WR-0806A

Shape & Size

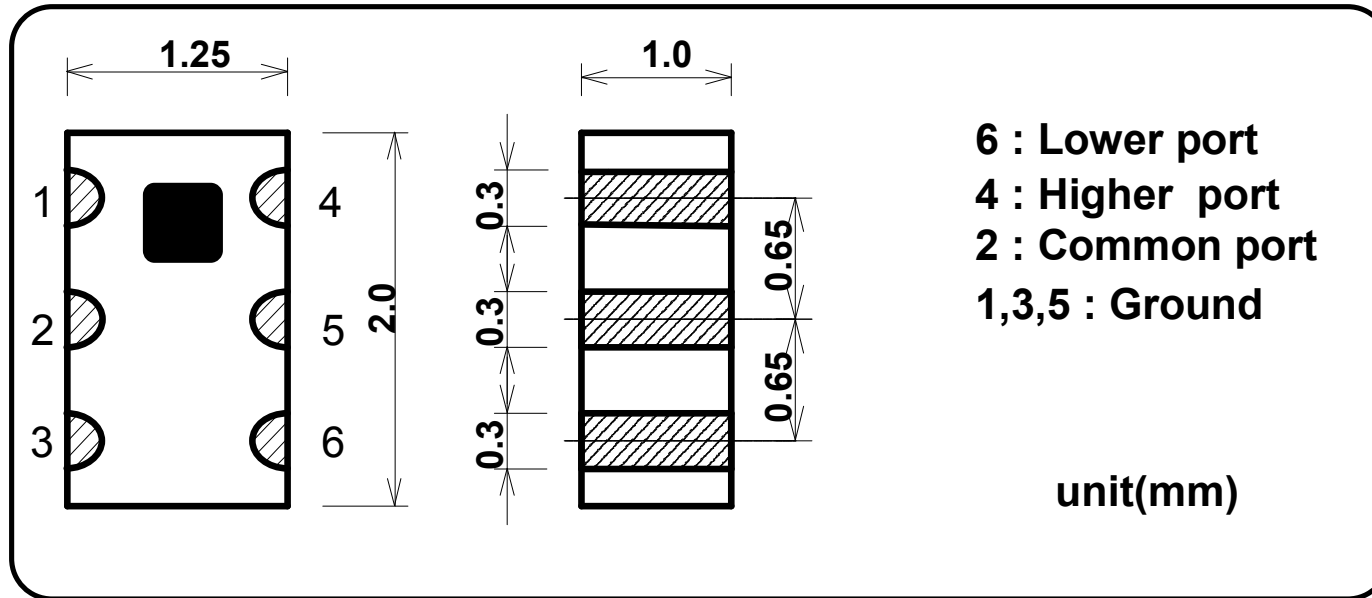

Specifications




Frequency Range	f1:824- 960MHz	Attenuation in f2 Lower <=>Common	18 dB Min.
	f2:1710-2170MHz		
Insertion Loss in f1 AMPS <=>Common	0.7dB Max.(at +25deg)	Attenuation in f1 Higher <=>Common	18 dB Min.
	0.75dB Max.(at -35to+85deg)		
Insertion Loss in f2 PCS <=>Common	0.7 dB Max.(at +25deg)	Power Capacity	3W Max.
	0.75dB Max.(at -35to+85deg)	Temperature Range	-35to+85deg
Return Loss (all port)	10 dB Min.		

"All the technical data and information contained herein are subject to change without notice."



ESLF-S090WR SAMPLE DATA

P/N	ESLF-S090WR
Doc. No.	LF-ESLF-S090WR-0806A

[Common \Leftrightarrow Lower]

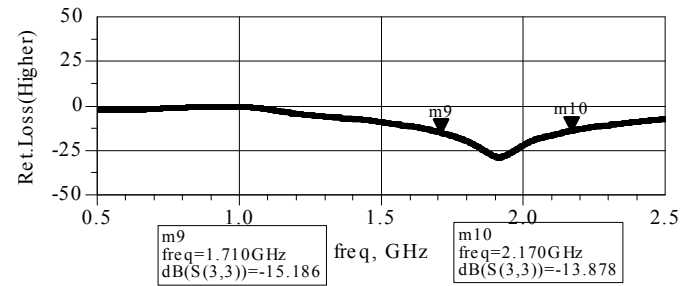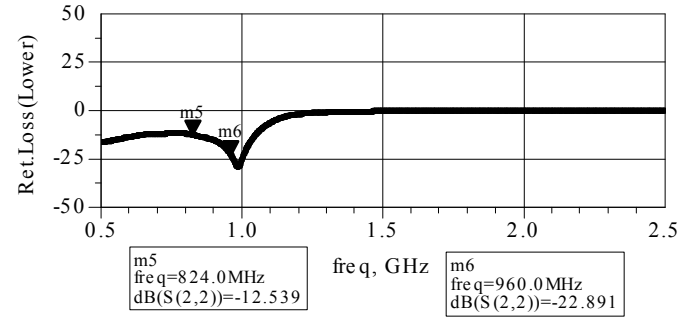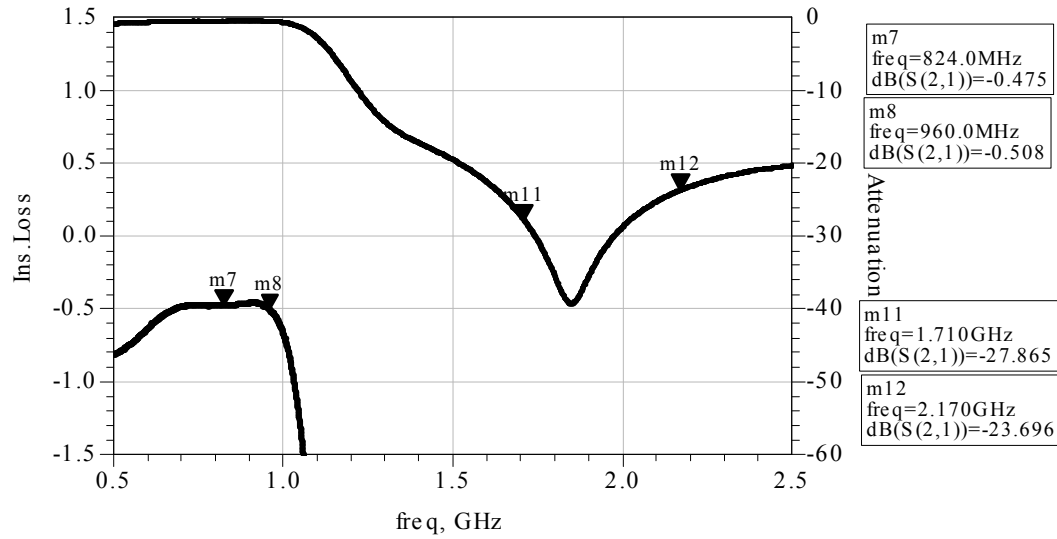


[Common \Leftrightarrow Higher]

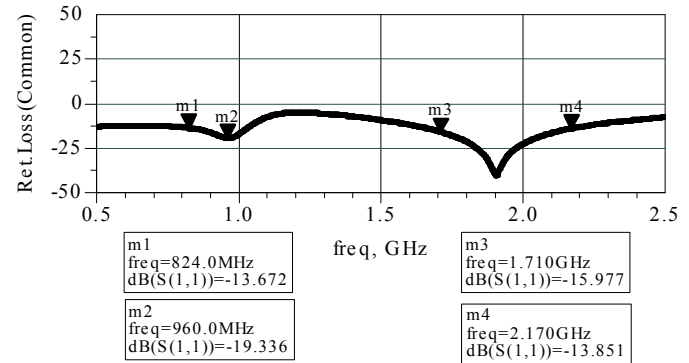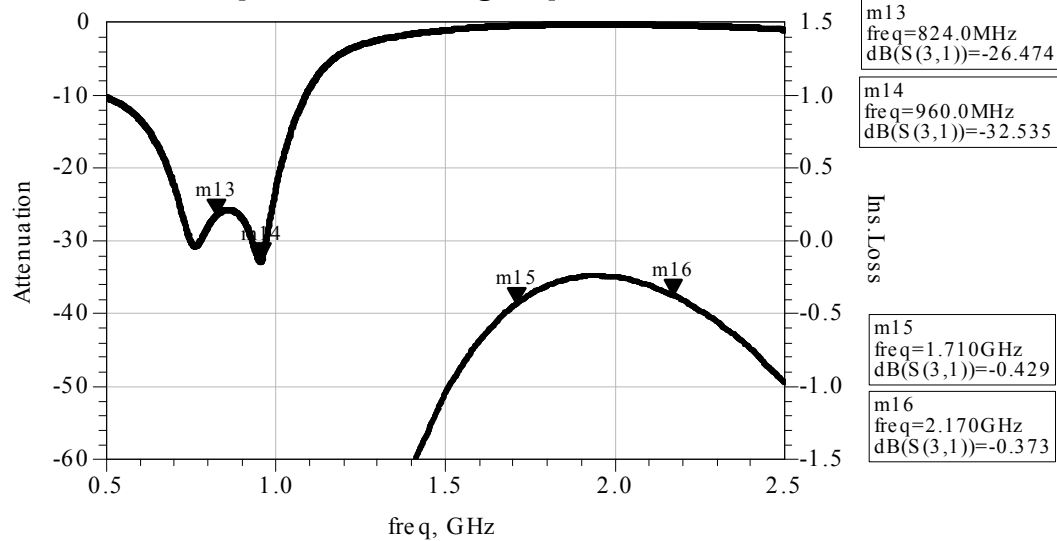

P/N	ESLF-S090WR
Doc. No.	LF-ESLF-S090WR-0806A

Foot Pattern

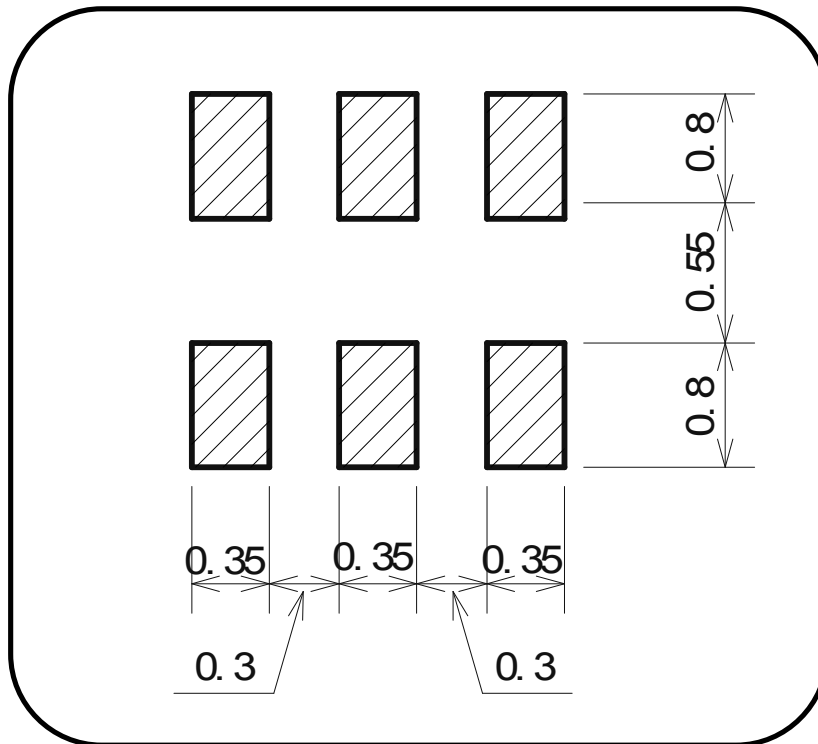

Foot Pattern Example

